



Specifications

TWO-POST 2, 4 and 6 Series

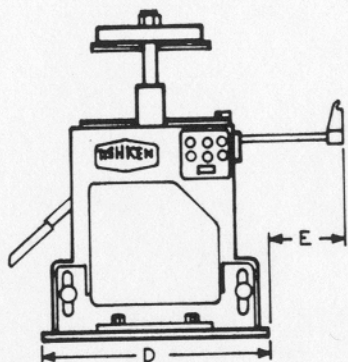


DESCRIPTION*	CO-2 -2	CO-4 -2	CO-6 -2
Approximate Tonnage	6	12	18
Standard Stroke	1½	2	2
Maximum Width of Cut	2	3	4
"A" Dim. Floor to Die Adj.	33-38	33-38	33-38
"B" Dim. Base Plate Width	33	42	48
"C" Dim. Adjustable	9¾-12¾	13-16	14½-17½
"D" Dim. Base Plate Length	24½	28½	28½
"E" Dimension	9	12	12
Motor Size and Speed	1HP 1200 RPM	2HP 1200 RPM	3HP 1200 RPM
Floor Space—Approx.	25x37	29x47	29x53
Shipping Wt. (lbs.)—Approx.	1200	1875	2100

SPECIAL SIZES AVAILABLE

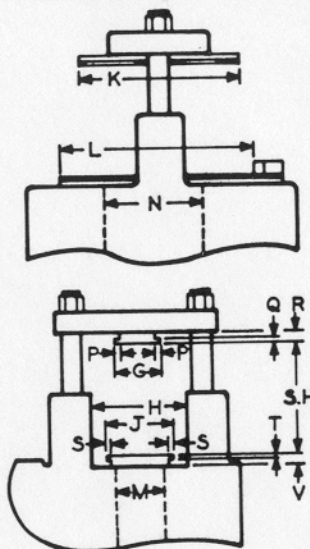

Sym.	CO-2 -2	CO-4 -2	CO-6 -2
G	21⅛	37⅛	37⅛
H	5¼	7	8
J	4250	5000	6000
K	9	12	12
L	11	14	14
M	2¼	3½	4¼
N	6	7¼	7¼
P	7⅛	½	½
Q	.365	.365	.365
R	¾	¾	¾
S	5⅛	5⅛	5⅛
T	.240	.240	.240
V	¾	¾	7⁄8
S.H.	4-5	4-5	4½-5½

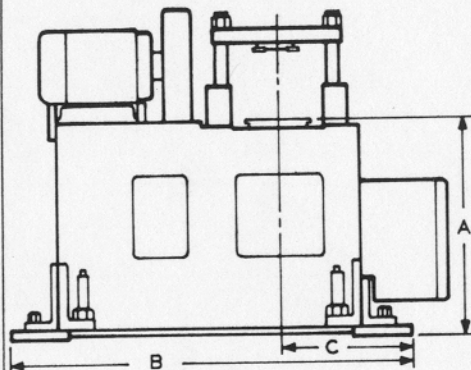


Specifications

FOUR-POST 2, 4 and 6 Series

DESCRIPTION*	CO-2 -4	CO-4 -4	CO-6 -4
Approximate Tonnage	6	12	18
Standard Stroke	1½	2	2
Maximum Width of Cut	2	3	4
"A" Dim. Floor to Die Adj.	33-39	33-38	33-38
"B" Dim. Base Plate Width	33	42	48
"C" Dim. Adjustable	9¾x12¾	13-16	14½x17½
"D" Dim. Base Plate Length	24½	28½	28½
"E" Dimension	9	12	12
Motor Size and Speed	2HP 1200 RPM	3HP 1200 RPM	5HP 1200 RPM
Floor Space—Approx.	25x37	29x47	29x53
Shipping Wt. (lbs.)—Approx.	1350	2075	2350

SPECIAL SIZES AVAILABLE

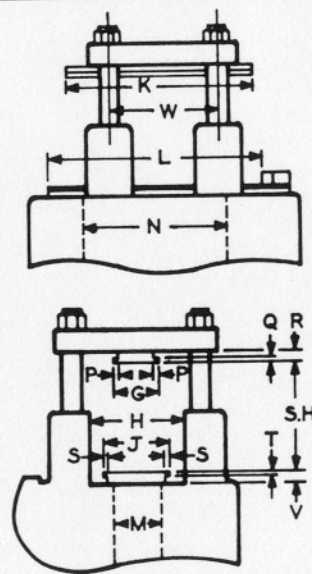

Sym.	CO-2 -4	CO-4 -4	CO-6 -4
G	21⅛	37⅛	37⅛
H	5¼	7	9
J	4250	5000	6000
K	12	14	14
L	14	16	16
M	2¼	3½	4¼
N	8	10	10
P	7⅛	½	½
Q	.365	.365	.365
R	¾	¾	3¼
S	5⅛	5⅛	5⅛
T	.240	.240	.240
V	¾	¾	¾
W	6	8	8
S.H.	4-5	4-9	4½-5½

Shut-height range for cut-off machines in this series is controlled by adjustable links.

*AIR OR MECHANICALLY OPERATED.

Stroke and shut-height indicated are standard. Machines with special stroke and shut-height can be furnished.

Filler plates for reducing shut-height or adapter plates for smaller die slides in larger machines are available as extras.
ALL DIMENSIONS IN INCHES.