


Fishman

COIL HOLDERS*

STANDARD DUTY Series


Selection of the proper coil holder depends on the weight, width, and inside diameter of the coil—see psge 62.

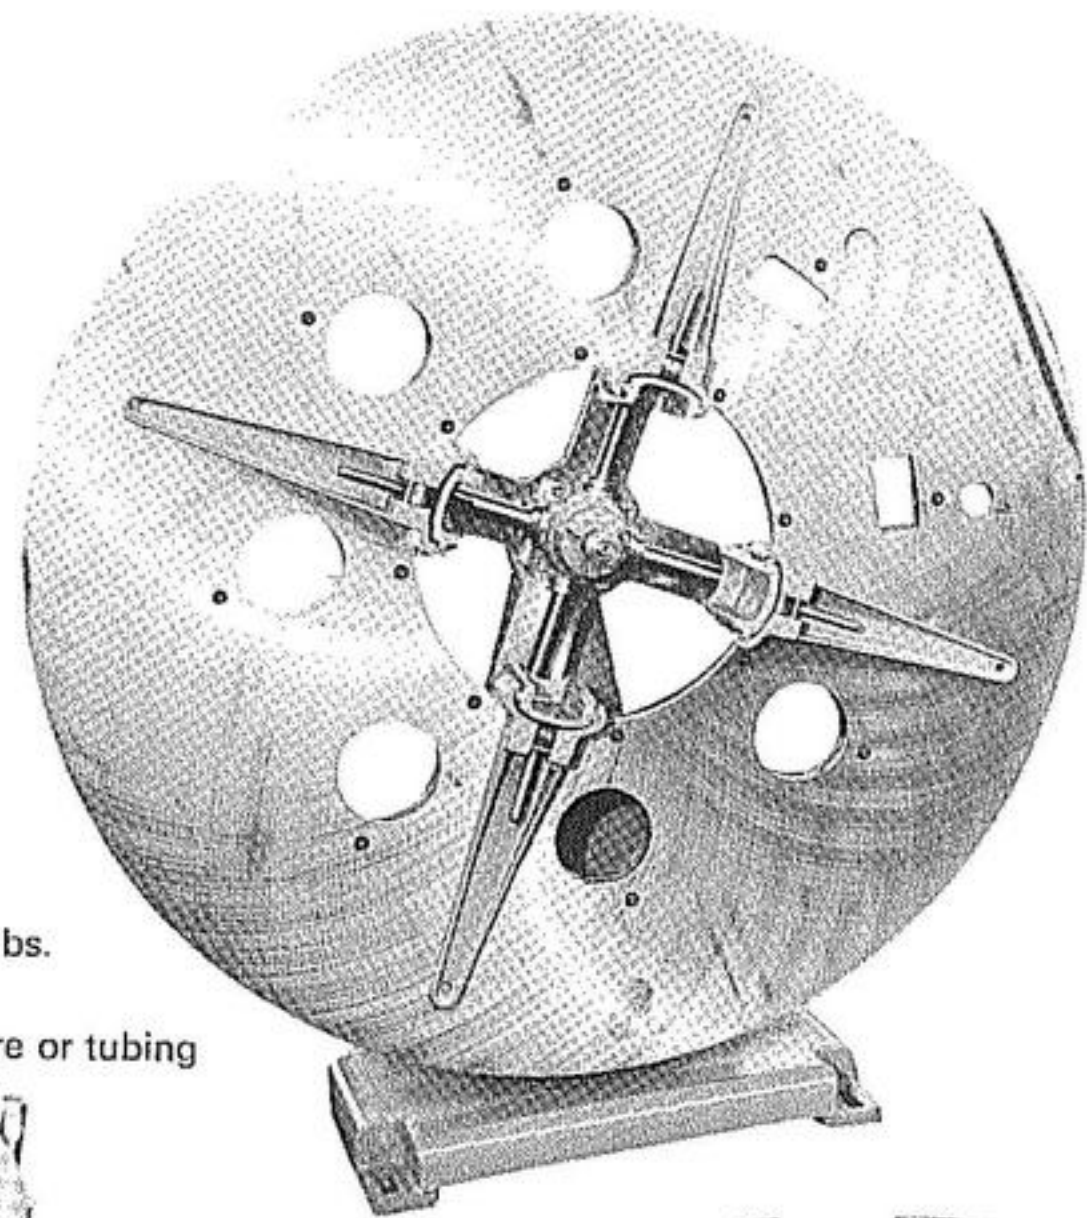

**MODEL
CR-8**
Capacity 350 lbs.


for wire or tubing

**RUGGED
SMOOTH
EFFICIENT
MODERN**

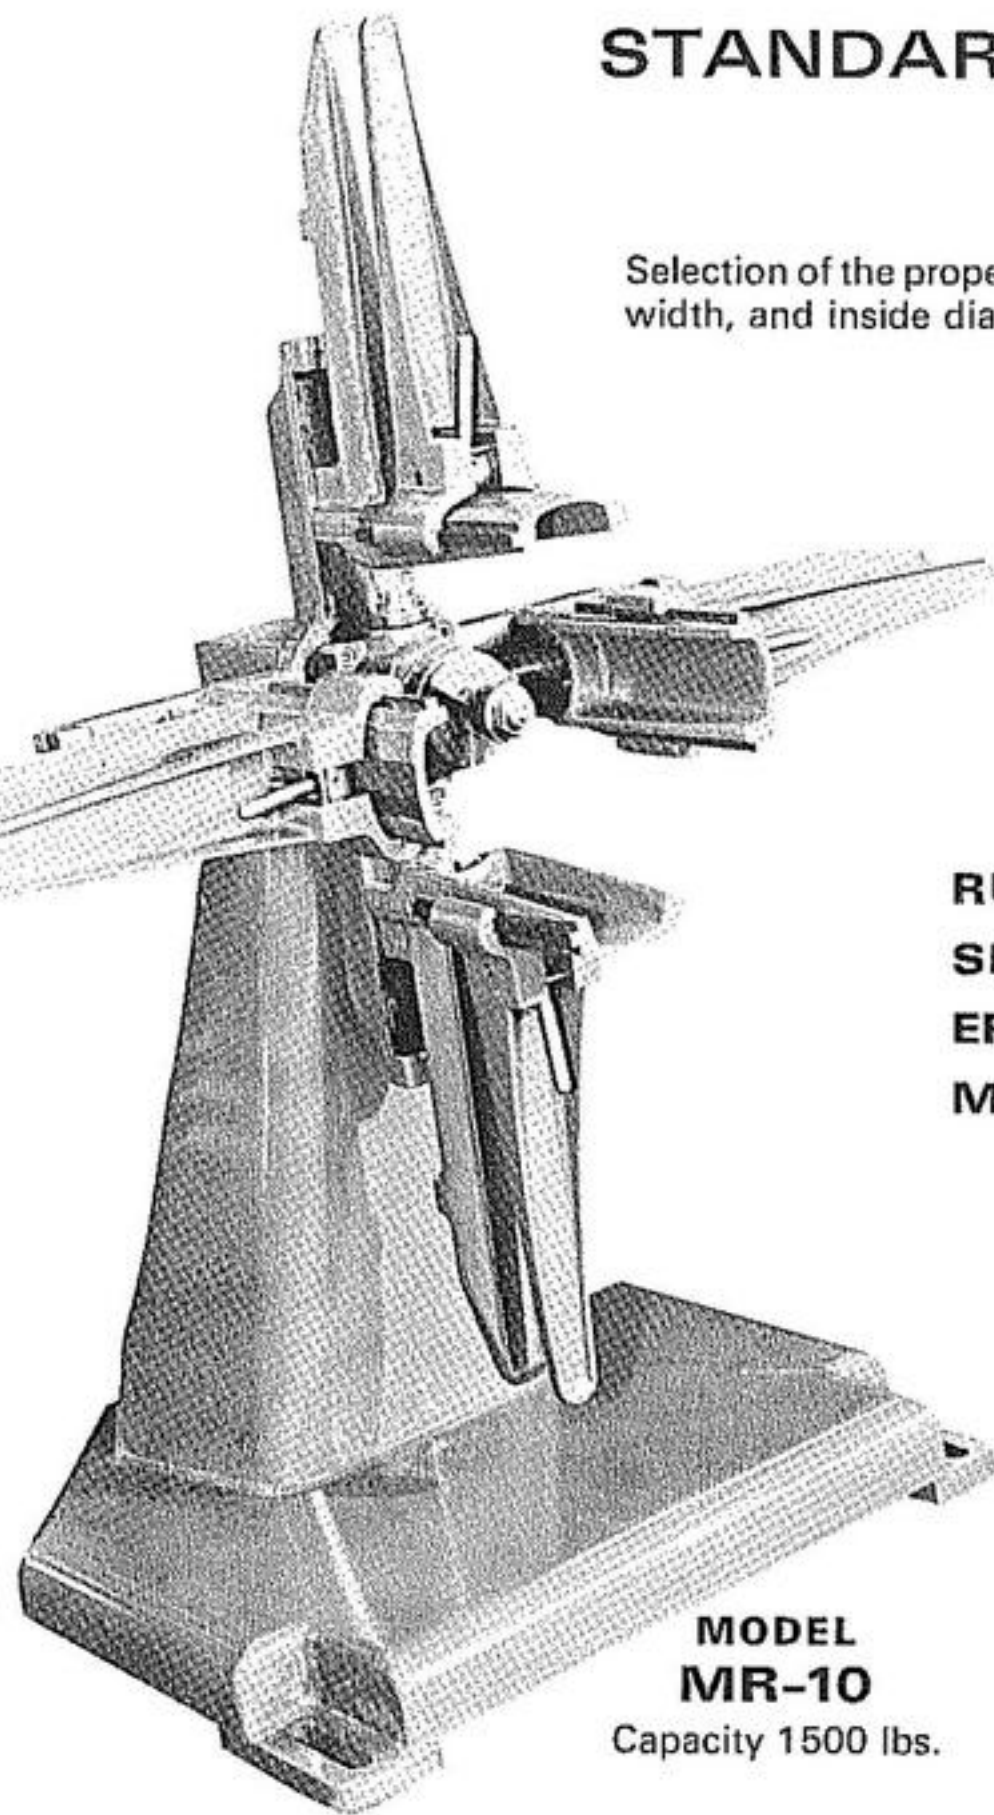


**MODEL
MR-10**
Capacity 1500 lbs.

for large or small diameter coils

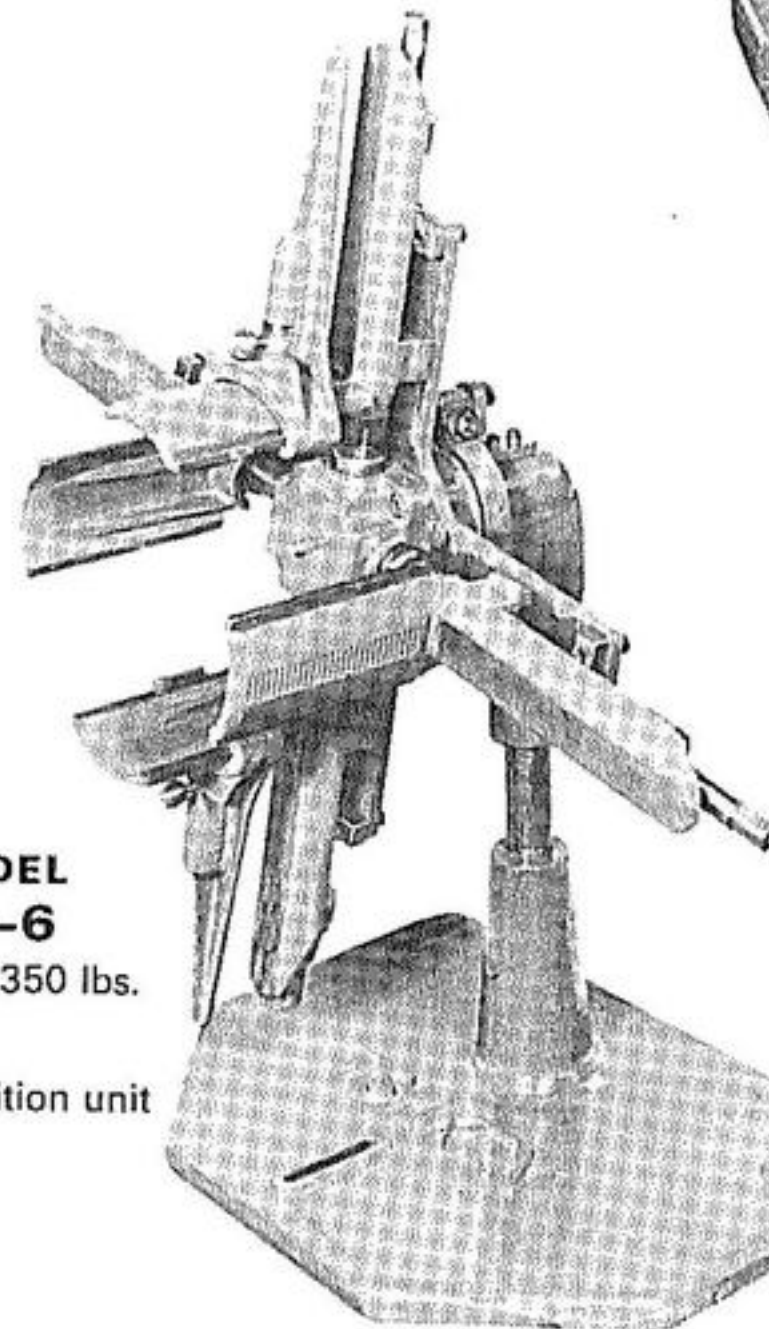

**MODEL
LR-6**
Capacity 350 lbs.

Versatile, two-position unit

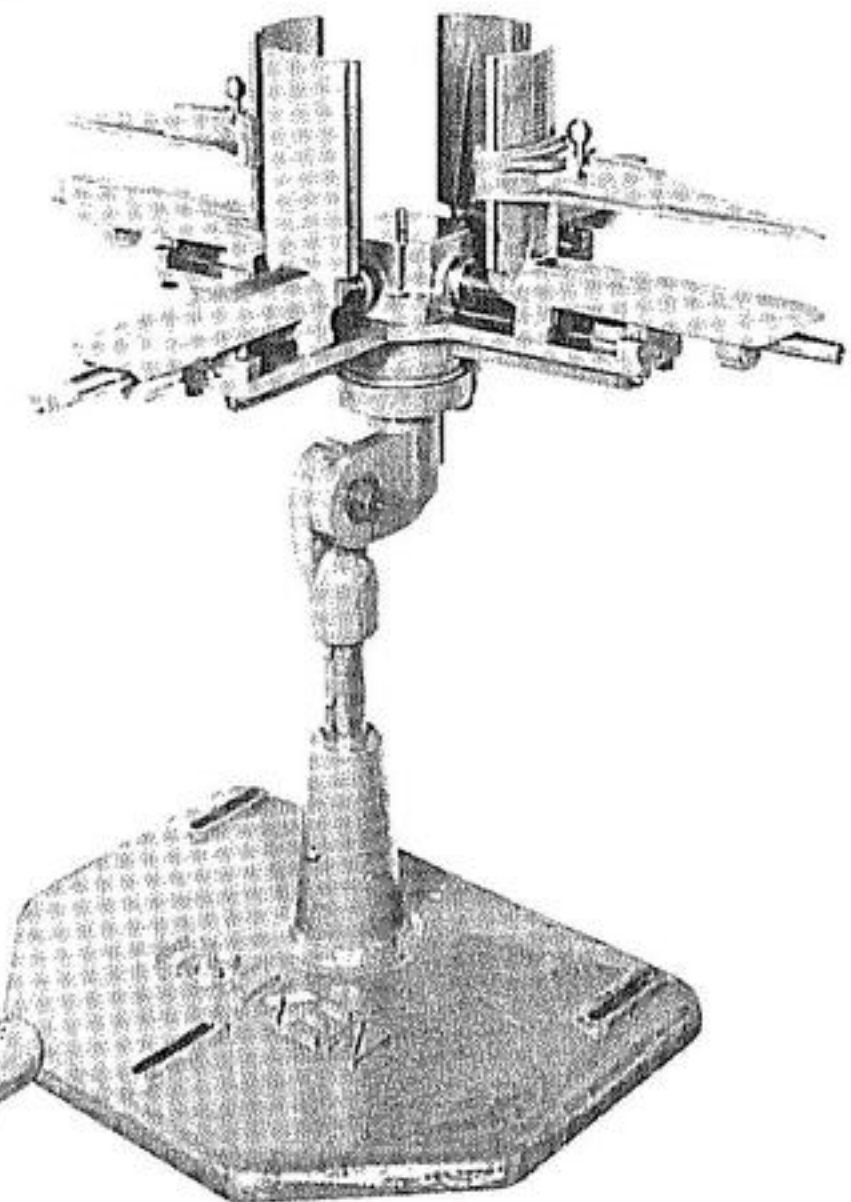

*PATENTED

COIL HOLDER Specifications

MODEL	CAPACITY POUNDS	MINIMUM DRUM DIA.	INSIDE DIAMETER	WILL HANDLE COILS					APPROXIMATE FLOOR SPACE	APPROXIMATE SHIPPING WT.	A	B	C
				INSIDE DIA. WITH FILLERS*	MAXIMUM OUTSIDE DIA.	MAXIMUM WIDTH	DISTANCE-FLOOR TO COIL CENTER						
CRB	350	6½	8 to 30	—	40	8	30	32 x 42	500	—	—	—	
LR6	350	9	10 to 18	—	48	6	27	23 x 48	350	8	6	—	
MR10	1500	10	11 to 21	—	60	10	36	36 x 60	900	14	10	—	
HR6	2500	10	11 to 21	—	60	6	36	32 x 60	1500	9	6	—	
HR10	2500	10	11 to 21	—	60	10	36	36 x 60	1700	14	10	—	
MR12	3000	12	13 to 18	17 to 22	60	12	37	44 x 60	2800	15½	12	8½	
HR18	7000	11½	12 to 16	16 to 20	48	18	32	50 x 68	4100	22	18	14	
HR24	10000	13½	14 to 18	18 to 22	60	24	39	50 x 90	5200	28	24	20	
HR36	18000	14¾	16 to 18	18 to 21	60	36	39	50 x 110	6200	41	36	31	
HXR24	18000	14¾	16 to 18	18 to 21	60	24	39	50 x 102	6000	29	24	19	
HXR36	25000	18½	20 to 23	23 to 26	60	36	41	60 x 128	7500	36	32	28	
HXR48	25000	18½	20 to 23	23 to 26	60	48	41	60 x 140	9500	48	44	40	

All coil reels have drag brakes.
Manual expansion is standard.
*Drum fillers supplied when ordered.

Double coil holders, motor drives, dancer controls,
hydraulic expansion and lateral adjustments are available.

