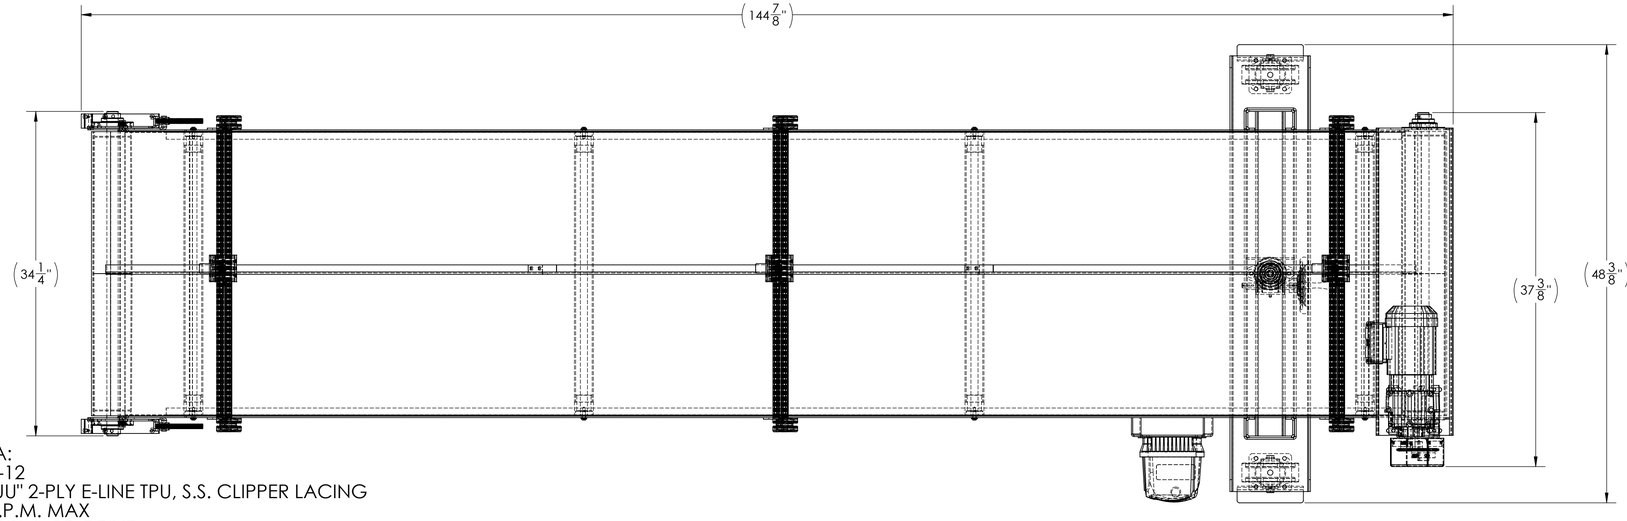

CONVEYOR DATA:
MODEL: HHS3000-12
BELT: 30" WIDE "BUU" 2-PLY E-LINE TPU, S.S. CLIPPER LACING
BELT SPEED: 100 F.P.M. MAX
BELT DIRECTION: TOWARD DRIVE
MOTOR HORSE POWER: 3/4HP
CONVEYOR MAX LIVE LOAD: 50 LBS
MOUNT STYLE: "AIL" TOP MOUNT LEFT SIDE AS SHOWN
MOTOR MOUNT CLEARANCE: 7"
FRAME CONSTRUCTION: 10 GAGE FORMED STEEL
ELECTRICAL: 115-1-60 Hz. INPUT, 230-3-60 Hz. OUTPUT
CONTROLS: SEW VARIABLE FREQUENCY DRIVE
NO INTEGRATED E-STOP FUNCTION
SUPPORTS: HEAVY DUTY FORMED STEEL, +/- 6" ADJUSTMENT ON DRIVE
CASTERS: (2) 6" DIA. STEEL RIGID W/BRAKE
PAINT: CONVEYOR, VISTA GREEN ENAMEL (PNT00011)
GUARDING, SAFETY YELLOW ENAMEL (PNT00246)
OPTIONS:

- MULTIPLE SECTION REMOVABLE BELT DIVIDER, 6" TALL, MOUNTED ON REMOVABLE EXTRUDED ALUMINUM
- SKID PLATES ON TAIL END
- ACME SCREW JACK W/HANDLE, 12" TOTAL ADJUSTMENT, 5:1 RATIO (25 TURNS/INCH OF TRAVEL)

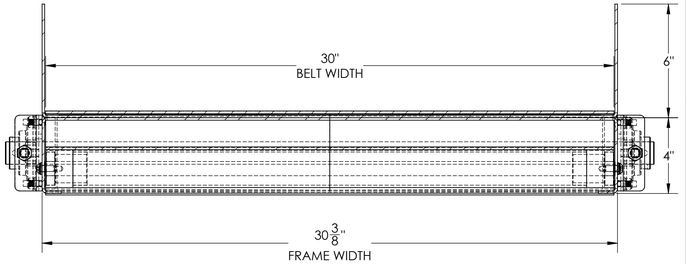

SECTION A-A
SCALE 1 : 4

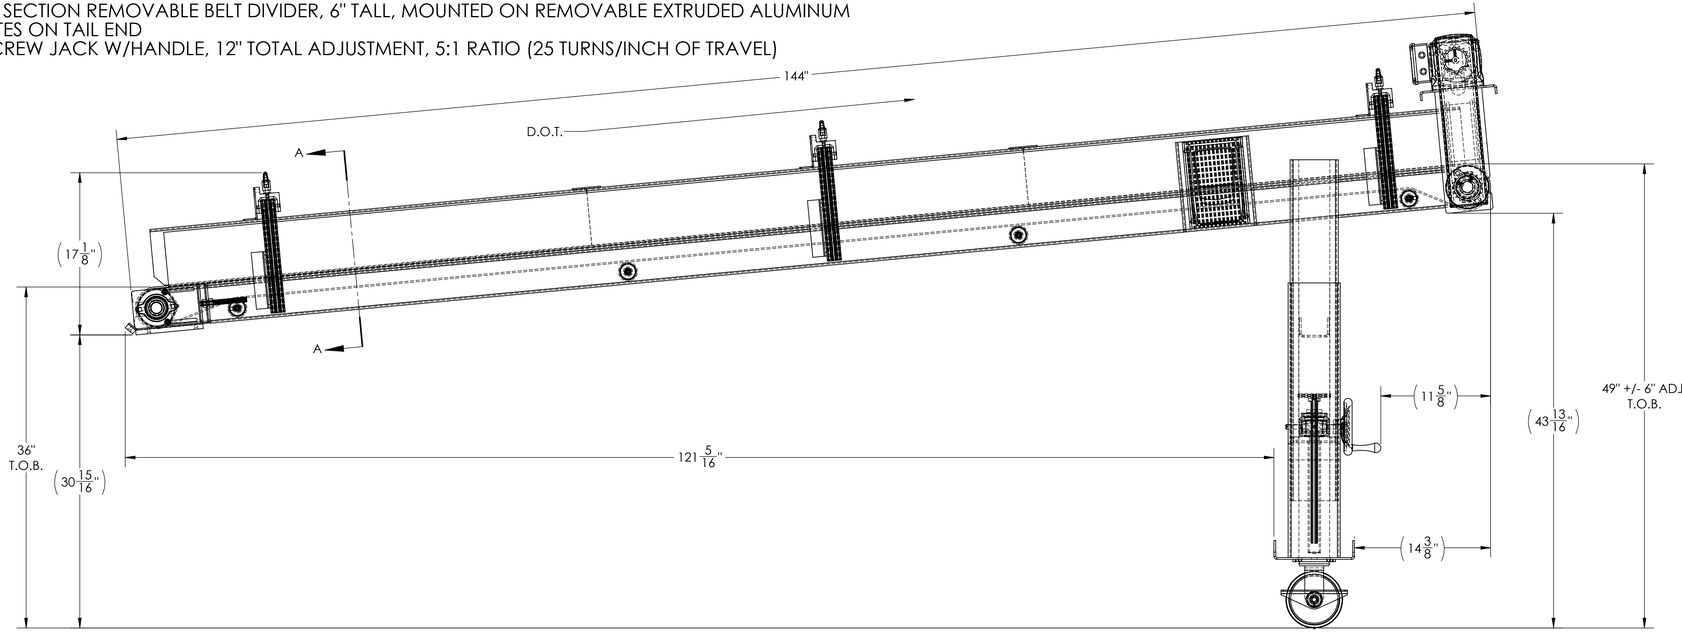

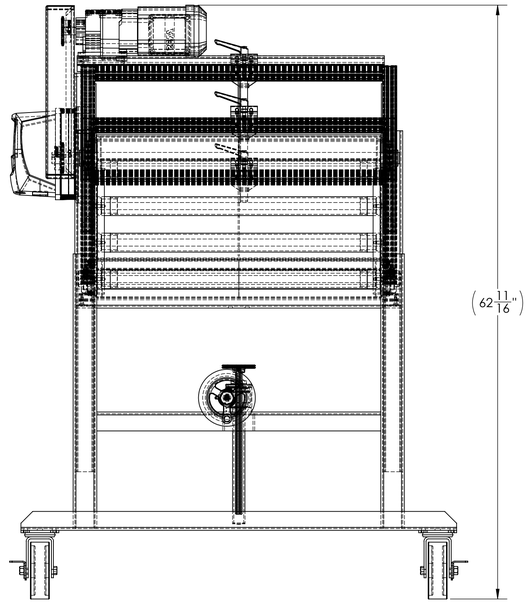

THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WARDCRAFT CONVEYOR. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF WARDCRAFT CONVEYOR IS PROHIBITED.

WARDCRAFT
ONE WARDCRAFT DRIVE
SPRING ARBOR, MI 49283
PHONE (800)782-2779 FAX (517)750-2244
www.wardcraftconveyor.com

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/8
ANGULAR: MACH ±1°
TWO PLACE DECIMAL ±.06
THREE PLACE DECIMAL ±.031
INTERPRET GEOMETRIC TOLERANCING PER:
MATERIAL
FINISH
NOTE:

	NAME	DATE
DRAWN	DSC	2/25/2019
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

DEXTER STAMPING
TITLE: HHS3000-12
SIZE D | DWG. NO. 52738-001 | REV
SCALE 1:12 | WEIGHT: | SHEET 1 OF 1