


No. 557 12-Roll Straightener

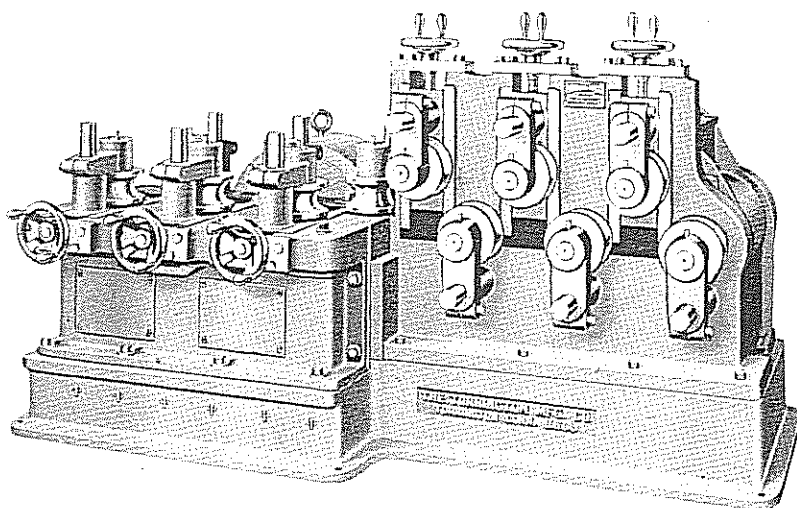

No. 985 12-Roll Straightener

TORRINGTON TWELVE ROLL TUBE AND ROD STRAIGHTENERS

ROLL ARBORS ANTI-FRICTION AND WITH OUT-BOARD BEARINGS

Mach. No.	Roll Dia.	Roll Face	Roll Bore	Roll Center	CAPACITY: METAL AT 30,000 LB. (YIELD STRENGTH)							Speed F.P.M.	MOTOR		Height to Metal Line	APPROX. FLOOR SPACE		Approx. Weight lbs.
					RODS (MAX.)			TUBES		Max. Pipe Size	H.P.		R.P.M.	Length		Width		
					Round	Hex.	Sq.	O.D.	Wall									
790	3/4"	3/8"	5/16"	1"	1/16"	1/16"	1/16"	1/16" to 1/8"	.032"	—	200	1 1/2	1800	40"	14"	18"	385	
557	1 1/2"	1 1/4"	5/8"	2 1/2"	1/8"	1/8"	1/8"	1/16" to 3/16"	.032"	—	200	1 1/2	1800	40"	22"	22"	575	
321	2"	3/4"	3/4"	4"	1/4"	1/4"	7/32"	1/4" to 5/8"	.049"	1/8"	200	2	1200	40"	32"	32"	1350	
1733	3"	1"	1"	6 1/4"	1/2"	1/2"	7/16"	7/16" to 3/4"	.049"	1/4"	200	3	1200	40"	49"	38"	2500	
388	3 7/8"	1 3/8"	1 3/8"	8 1/2"	3/4"	23/32"	21/32"	3/8" to 1"	.065"	1/2"	200	5	1200	40"	62"	42"	3500	
305	4 1/2"	2 1/4"	1 1/2"	10"	1"	1 1/32"	7/8"	5/8" to 1 1/2"	.072"	3/4"	175	7 1/2	1200	40"	74"	49"	5000	
577	5 1/2"	3"	1 3/4"	12"	1 3/8"	1 5/16"	1 7/32"	3/4" to 2"	.083"	1 1/4"	175	10	900	40"	89"	60"	7000	
1734	6 1/2"	3 3/4"	2 1/4"	13"	1 3/4"	1 21/32"	1 9/16"	1" to 2 1/2"	.095"	1 1/2"	150	15	900	40"	94"	72"	10500	
985	7 1/2"	4 1/4"	2 1/2"	14"	2"	1 29/32"	1 3/4"	1 1/2" to 3"	.109"	2"	150	20	900	40"	100"	80"	13000	
615	9"	5"	3 1/2"	18"	2 1/2"	2 13/32"	2 7/32"	2" to 4"	.120"	2 1/2"	100	30	900	40"	138"	124"	25000	

TORRINGTON TWENTY-FOUR ROLL TUBE AND ROD STRAIGHTENERS

ROLL ARBORS ANTI-FRICTION AND WITH OUT-BOARD BEARINGS

1736	4"	1 3/4"	1 3/8"	8 1/2"	3/4"	23/32"	21/32"	3/8" to 1"	.065"	1/2"	200	10	1200	40"	9' 0"	4' 9"	6500
1737	4 1/2"	2 1/4"	1 1/2"	10"	1"	1 1/32"	7/8"	5/8" to 1 1/2"	.072"	3/4"	175	15	1200	40"	10' 6"	5' 6"	9000
1690	5 1/2"	3"	1 3/4"	8"	1 3/8"	1 5/16"	1 7/32"	3/4" to 2"	.083"	1 1/4"	175	20	1200	40"	10' 6"	6' 7"	12000
1738	6 1/2"	3 3/4"	2 1/4"	13"	1 3/4"	1 21/32"	1 9/16"	1" to 2 1/2"	.095"	1 1/2"	150	30	1200	40"	14' 0"	7' 4"	17500
1706	7 1/2"	4 1/4"	2 1/2"	14"	2"	1 29/32"	1 3/4"	1 1/2" to 3"	.109"	2"	150	40	1200	40"	15' 6"	8' 5"	25000
1739	9"	5"	3 1/2"	18"	2 1/2"	2 13/32"	2 7/32"	2" to 4"	.120"	2 1/2"	100	60	900	40"	19' 0"	12' 0"	42000

